






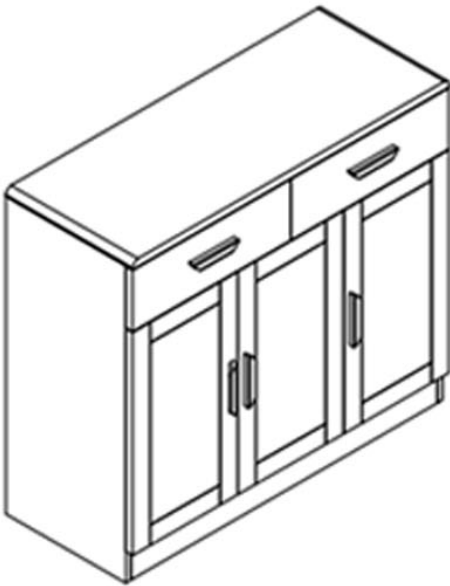

X33#Three-Door Shoe Cabinet

3-in-1 User Guide


- 1.Insert the screw directly into the side panel hole with a diameter of 6.
- 2.Insert the other end of the screw into the hole of the opposite connecting panel.
Insert the eccentric lock washer into the 15mm diameter hole, ensuring the cross arrow aligns with the side hole.
- 3.Use a cross screwdriver to tighten the eccentric washer clockwise.




| Furniture Hardware | | | | |
|--------------------|----------------------------------------------|---------------------------------------------------------------------------------------|----------|-------|
| Serial Number | Specification Name | Diagram | Quantity | Unit |
| A | 3-in-1 Connecting Rod |  | 45 | Piece |
| B | 3-in-1 Cross Handle |  | 45 | Piece |
| C | 8 Diameter * 40mm Wood Dowel |  | 8 | Piece |
| D | Self-Tapping Screw, 3.5 Diameter * 12 Length |  | 55 | Piece |
| E | Self-Tapping Screw, 3.5 Diameter * 20Length |  | 10 | Piece |
| F | Handle Screw |  | 11 | Piece |
| G | Shelf Support, 5 Diameter * 13 Length |  | 26 | Piece |
| H | Furniture Leg Pads |  | 5 | Piece |

| Serial Number | Part Name | Quantity |
|---------------|--------------------------|----------|
| 1 | Middle Leg Rail | 1 |
| 2 | Front and Rear Leg Rails | 2 |
| 3 | Bottom Panel | 1 |
| 4 | Middle Side Panel | 1 |
| 5 | Pull Bar | 2 |
| 6 | Small Middle Side Panel | 1 |
| 7 | Outer Side Panel | 2 |
| 8 | Back Pull Bar | 1 |
| 9 | Back Panel | 2 |
| 10 | Front Panel | 1 |
| 11 | Drawer Front | 2 |
| 12 | Drawer Side Panel | 4 |
| 13 | Drawer Bottom Panel | 2 |
| 14 | Drawer Back Panel | 2 |
| 15 | Door Panel | 3 |
| 16 | Short Adjustable Shelf | 3 |
| 17 | Long Adjustable Shelf | 3 |


Step 1:

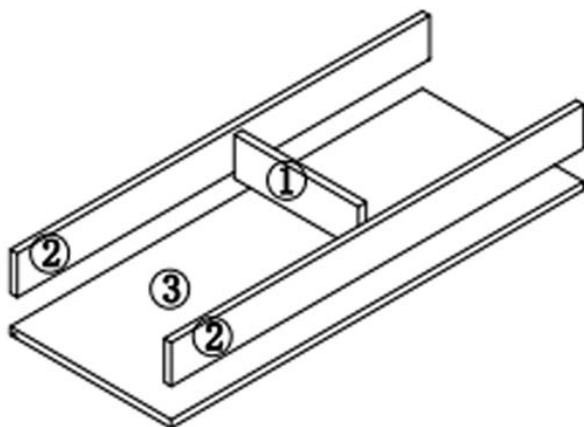





Step 2:

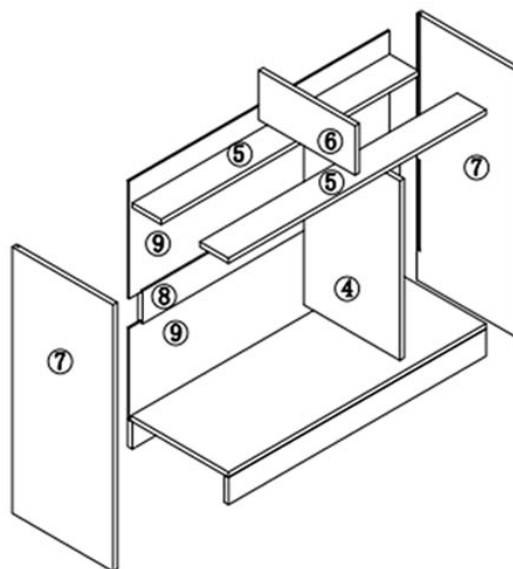

Step 3:

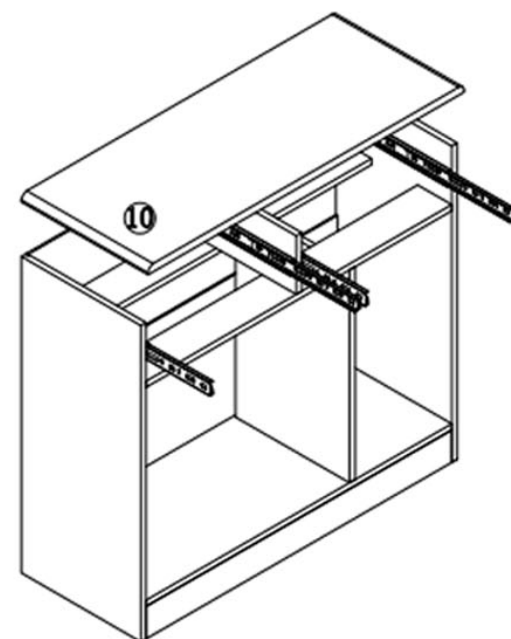

Step 4:

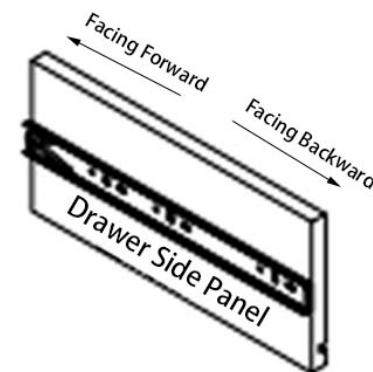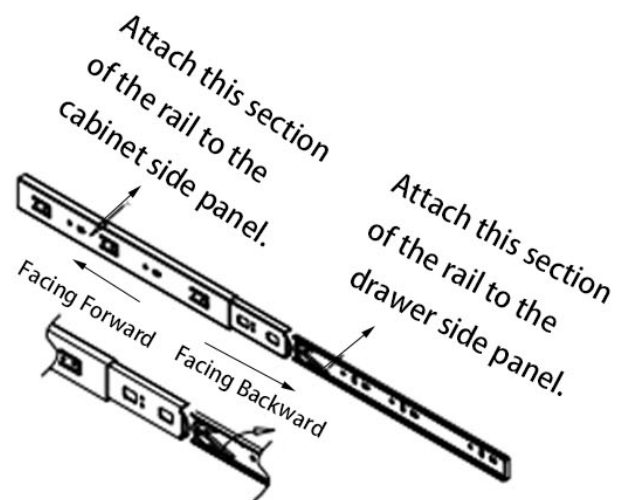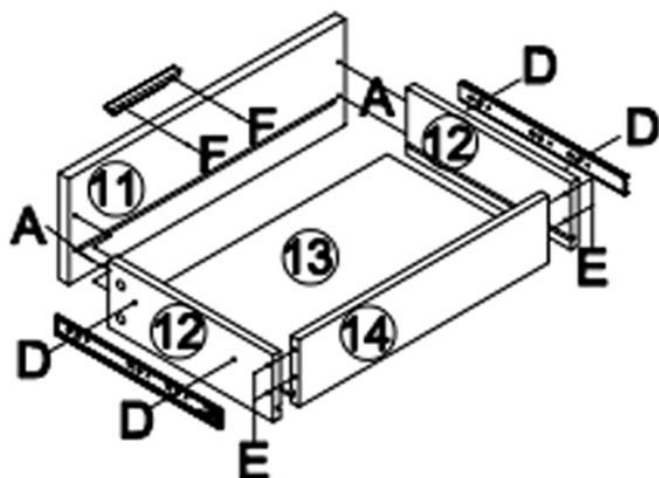

1.

When installing the side panel, first fasten this screw to allow for vertical gap adjustment. After ensuring the gaps between the upper and lower door panels are even, tighten the remaining screws to secure the panel.


2.

After the upper and lower door gaps are adjusted evenly, use this screw to adjust the left and right gap between the door panels.

3.

Adjusting the tightness of this screw allows for slight in-and-out adjustment of the door panel. If the door protrudes too much, repeat Step 1 to reposition the entire hinge inward before reinstalling.

First install the door hinge onto the door panel. Then lay the door panel flat and align it with the holes on the side panel for installation.

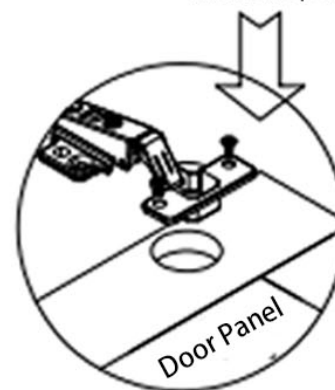

Step 5:

